

PF360 Series Residual Current Circuit Breaker




Application

The item is in comply with standard of IEC61008-1, applying to the circuit of AC 50/60Hz, 230V single phase, 400V three phases or below it for industrial and mining enterprise, trading building, commerce and family. It is mainly used for preventing electric fire and personal casual accident caused by personal electric shock or leakage of electrified wire net, this is a current operated, fast leakage protector of pure electromagnetic type, which can break off fault circuit rapidly in order to avoid occurrence of accident. The item is precise in structure, less elements, without auxiliary power and high working reliability. The function of the switch won't be influenced by ambient temperature and lightning. The mutual inductor of the item is used to test vector differential value of passing current, and produces a relevant output power and add it to the tripper in secondary winding, if the current of vector differential value of protected circuit of personal electric shock is up to or over leakage operating current, the tripper will act and cut off so that the item will take effect of protection.

PF360 Series Residual Current Circuit Breaker

Working Principle

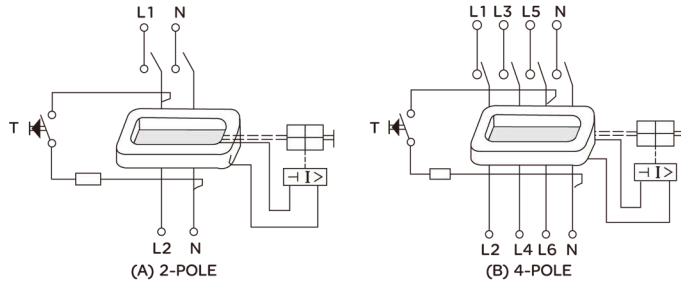

Specifications

	Standard	IEC/EN 61008
	Mode	Electro-magnetic type, electronic type
	Type(wave form of the earth leakage sensed)	A,AC
	Rated current I_n	A 16,25,32,40,63
	Poles	P 2,4
	Rated voltage U_e	V AC 240/415
Electrical features	Rated sensitivity $I_{\Delta n}$	A 0.01,0.03,0.1,0.3,0.5
	Insulation voltage U_i	V 500
	Rated residual making and breaking capacity $I_{\Delta m}$	A 630
	Short-circuit current $I_{\Delta c}$	A 6000
	SCPD fuse	A 6000
	Rated frequency	Hz 50/60
	Pollution degree	2
	Electrical life	4,000
	Mechanical life	10,000
Mechanical features	Protection degree	IP20
	Ambient temperature(with daily average $\leq 35^{\circ}\text{C}$)	$^{\circ}\text{C}$ -25 ~ +40
	Storage temperature	$^{\circ}\text{C}$ -25 ~ +70

PF360 Series Residual Current Circuit Breaker

	Standard	IEC/EN 61008
	Terminal connection type	Cable/U-type busbar/Pin-type busbar
Installation	Terminal size top for cable	mm ² 25 AWG 18-3
	Terminal size top for busbar	mm ² 35 AWG 18-3
	Tightening torque	N*m 2.5 In-lbs 22
	Mounting	On DIN rail EN 60715 (35mm) by means of fast clip device
	Connection	From top and bottom

Wiring Diagram

